

**PRODUCT
CATALOG**

Le
e
a
n
t
®



egeban

3 3 1 3 3 4
SanCut
EN 388
AKA2D
EN 407:2004
XXXXX

10
SIZE



PERSONAL PROTECTIVE EQUIPMENT

www.egebant.com.tr

General Work Gloves

Applications

- Construction
- Mechanical assembly
- Oily environment
- Gardening
- General handling




Nitrile Coated General Work Gloves




SanSoft NP01

Coating Material Nitrile
 Liner Material Cotton
 Coating/Liner Color Yellow/Ecru
 Sizes 8, 9, 10




SanSoft NP01 Blue

Coating Material Nitrile
 Liner Material Cotton
 Coating/Liner Color Blue/Ecru
 Sizes 8, 9, 10



SanSoft NP02

Coating Material Nitrile
 Liner Material Cotton
 Coating/Liner Color Yellow/Ecru
 Sizes 9, 10



SanSoft NP02 Blue

Coating Material Nitrile
 Liner Material Cotton
 Coating/Liner Color Blue/Ecru
 Sizes 9, 10



Dry and Less Oily Applications

Series 111



General Properties

Assembly gloves; light weight, higher fingertip sensitivity, thin structure and good fit to hands, perfect price / performance ratio

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance

SanFit 111330

| | |
|----------------|---------------|
| Coating | Micro Foam PU |
| Coating Color | Black |
| Liner | Polyester |
| Liner Color | Black |
| Gauge | 13G |
| Palm Thickness | 0.80 mm |



General Properties

It is produced by coating thin, breathable and durable Polyurethane (PU) on a durable polyester lining. While protecting your hand against mechanical risks, it does not compromise fingertip sensitivity. It makes it easier to hold dry and less oily parts compared to holding with bare hands.




Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance

SanFit 111220

| | |
|----------------|--------------|
| Coating | Polyurethane |
| Coating Color | White |
| Liner | Polyester |
| Liner Color | White |
| Gauge | 13G |
| Palm Thickness | 0.80 mm |



PU Coated Precision Assembly Gloves



SanFit 111230

| | |
|----------------|---------------|
| Coating | Micro Foam PU |
| Coating Color | Black |
| Liner | Polyester |
| Liner Color | White |
| Gauge | 13G |
| Palm Thickness | 0.80 mm |



Series 161

General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, comfortable, fits adaptively to hands.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance



SanFit 161330

| | |
|----------------|---------------|
| Coating | Micro Foam PU |
| Coating Color | Black |
| Liner | Polyester |
| Liner Color | Black |
| Gauge | 13G |
| Palm Thickness | 1.00 mm |



Lightweight ■ Moderate Resistance ■ High Level of Comfort ■ Good Fit to Hands ■ High Resistance ■ Silicone-Free



PU Coated Precision Assembly Gloves



SanFit 161240

| | |
|----------------|---------------|
| Coating | Micro Foam PU |
| Coating Color | Grey |
| Liner | Polyester |
| Liner Color | White |
| Gauge | 13G |
| Palm Thickness | 1.00 mm |



General Properties

It is produced with a thin, breathable and durable Polyurethane coating on electrostatic discharge protection featured carbon lining. Thanks to its thin and durable structure, it provides maximum protection and abrasion resistance without sacrificing fingertip sensitivity and comfort. It makes it easier to hold dry and less oily parts compared to holding with bare hands.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance, assembly of electrical/electronic components



SanFit 721740

| | |
|----------------|--------------------------|
| Coating | Polyurethane |
| Coating Color | Grey |
| Liner | Carbon & Nylon & Spandex |
| Liner Color | Blue & Black Melange |
| Gauge | 18G |
| Palm Thickness | 1.00 mm |



General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance




SanFit 121220

| | |
|----------------|---------------|
| Coating | Micro Foam PU |
| Coating Color | White |
| Liner | Polyamide |
| Liner Color | White |
| Gauge | 13G |
| Palm Thickness | 0.90 mm |



SanFit 121330

| | |
|----------------|---------------|
| Coating | Micro Foam PU |
| Coating Color | Black |
| Liner | Polyamide |
| Liner Color | Black |
| Gauge | 13G |
| Palm Thickness | 0.90 mm |



PU Coated Precision Assembly Gloves

Series 121



SanFit 121440

| | |
|----------------|---------------|
| Coating | Micro Foam PU |
| Coating Color | Grey |
| Liner | Polyamide |
| Liner Color | Grey |
| Gauge | 13G |
| Palm Thickness | 0.90 mm |



Series 166

General Properties

Working gloves; ultra-light weight, offering maximum fingertip sensitivity, easily tearable.

Areas of Usage

Light assembly works, working with small pieces and applications for which the fingertip sensitivity is very important.



SanFit 166330

| | |
|----------------|----------------------|
| Coating | Micro Foam PU |
| Coating Color | Black |
| Liner | Polyester & Elastane |
| Liner Color | Black |
| Gauge | 18G |
| Palm Thickness | 0.50 mm |



Nitrile Foam Coated Precision Assembly Gloves

Series **371**

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.



Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance



SanFoam 371731

| | |
|----------------|----------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | Nylon&Spandex |
| Liner Color | Grey & Black Melange |
| Gauge | 15G |
| Palm Thickness | 0,90 mm |



General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.



Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance



SanFoam 521241

| | |
|----------------|----------------------|
| Coating | Delight Nitrile Foam |
| Coating Color | Grey |
| Liner | Polyamide |
| Liner Color | White |
| Gauge | 15G |
| Palm Thickness | 0.80 mm |



Series **521**

Lightweight ■ High Degree of Gripping ■ High Level of Comfort ■ Moderate Resistance ■ High Resistance ■ Good Fit to Hands



Nitrile Foam Coated Precision Assembly Gloves

Series **521**



SanFoam 521331

| | |
|----------------|----------------------|
| Coating | Delight Nitrile Foam |
| Coating Color | Black |
| Liner | Polyamide |
| Liner Color | Black |
| Gauge | 15G |
| Palm Thickness | 0.90 mm |



SanFoam 521431

| | |
|----------------|----------------------|
| Coating | Delight Nitrile Foam |
| Coating Color | Black |
| Liner | Polyamide |
| Liner Color | Grey |
| Gauge | 15G |
| Palm Thickness | 0.90 mm |



Nitrile Foam Coated Precision Assembly Gloves

Series **521**



SanFoam 521731

| | |
|----------------|-----------------------|
| Coating | Delight Nitrile Foam |
| Coating Color | Black |
| Liner | Polyamide |
| Liner Color | Black & White Melange |
| Gauge | 15G |
| Palm Thickness | 0.90 mm |



SanFoam 521530

| | |
|----------------|----------------------|
| Coating | Delight Nitrile Foam |
| Coating Color | Black |
| Liner | Polyamide |
| Liner Color | Red |
| Gauge | 15G |
| Palm Thickness | 0.80 mm |



Thin ■ High Degree of Gripping ■ High Resistance ■ Lightweight ■ Moderate Resistance ■ High Level of Comfort



Nitrile Foam Coated Precision Assembly Gloves

Series **571**

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort, fits adaptively to hands and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.



SanFoam 571241

| | |
|----------------|----------------------|
| Coating | Delight Nitrile Foam |
| Coating Color | Grey |
| Liner | Nylon & Spandex |
| Liner Color | White |
| Gauge | 15G |
| Palm Thickness | 1.00 mm |



SanFoam 571331

| | |
|----------------|----------------------|
| Coating | Delight Nitrile Foam |
| Coating Color | Black |
| Liner | Nylon & Spandex |
| Liner Color | Black |
| Gauge | 15G |
| Palm Thickness | 1.00 mm |



Nitrile Foam Coated Precision Assembly Gloves

Series **571**



SanFoam 571431

| | |
|----------------|----------------------|
| Coating | Delight Nitrile Foam |
| Coating Color | Black |
| Liner | Nylon & Spandex |
| Liner Color | Grey |
| Gauge | 15G |
| Palm Thickness | 1.00 mm |



SanFoam 571731

| | |
|----------------|----------------------|
| Coating | Delight Nitrile Foam |
| Coating Color | Black |
| Liner | Nylon & Spandex |
| Liner Color | Grey & Black Melange |
| Gauge | 15G |
| Palm Thickness | 1.00 mm |



High Resistance ■ High Level of Comfort ■ High Degree of Gripping ■ Good Fit to Hands



Nitrile Foam Coated Precision Assembly Gloves

General Properties

It is produced by coating thin, breathable and durable Foam Nitrile on electrostatic discharge protection featured carbon lining. Thanks to its flexible structure, it fits very well in the hand and facilitates delicate work. It makes it easier to hold dry and less oily parts compared to holding with bare hands.



Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance, assembly of electrical/ electronic components



SanFoam 821740

| | |
|----------------|--------------------------|
| Coating | Foam Nitrile |
| Coating Color | Grey |
| Liner | Carbon - Nylon & Spandex |
| Liner Color | Blue & Black Melange |
| Gauge | 18G |
| Palm Thickness | 1,00 mm |



Uncoated Precision Assembly Gloves

General Properties

Gloves lining made of polyamide threads high level of flexibility and permeability.



Areas of Usage

Surface control treatments, general usage, special applications.



SanFit 020200

| | |
|----------------|----------|
| Coating | Uncoated |
| Liner | Nylon |
| Liner Color | White |
| Gauge | 15G |
| Palm Thickness | 0,70 mm |



General Properties

Working gloves; resistant to working with abrasive parts with extra durable PU coating, allowing for gripping hard pieces without pressure on hands with discontinuous finer structure, resistant to cuts.

Areas of Usage

General handling, working with metal pieces, material handling, rough assembly, heavy material handling.



SanCut 131242

| | |
|----------------|-------------------------------------|
| Coating | PU Extra |
| Coating Color | Grey |
| Liner | HPPE Spun & Polyester & Glass Fiber |
| Liner Color | White |
| Gauge | 15G |
| Palm Thickness | 1.00 mm |



EN 420



X1XXXX



4X42B



SanCut 131742

| | |
|----------------|-------------------------------------|
| Coating | PU Extra |
| Coating Color | Grey |
| Liner | HPPE Spun & Polyester & Glass Fiber |
| Liner Color | Black & White Melange |
| Gauge | 15G |
| Palm Thickness | 1.00 mm |



EN 420



X1XXXX



4X42B



PU Coated Cut Resistant Gloves

Series 131



SanCut 131744

| | |
|----------------|-------------------------------------|
| Coating | PU Extra |
| Coating Color | Grey |
| Liner | HPPE Spun & Polyester & Steel Fiber |
| Liner Color | Black & White Melange |
| Gauge | 13G |
| Palm Thickness | 1.10 mm |



Series 141

General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.



SanCut 141243


| | |
|----------------|---|
| Coating | Micro Foam PU |
| Coating Color | Grey |
| Liner | HPPE Spun & Polyester & Glass Fiber & Spandex |
| Liner Color | White |
| Gauge | 13G |
| Palm Thickness | 1.00 mm |





SanCut 141743

| | |
|----------------|--|
| Coating | Micro Foam PU |
| Coating Color | Grey |
| Liner | HPPE Spun & Polyester & Glass Fiber & Spandex |
| Liner Color | Black & White Melange |
| Gauge | 13G |
| Palm Thickness | 1.00 mm |



General Properties

Thanks to Dyneema Diamond Technology; light weight, comfortable durable and highly flexible cut resistant gloves.


Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.



SanCut 181242

| | |
|----------------|--------------------------------|
| Coating | Micro Foam PU |
| Coating Color | Grey |
| Liner | Dyneema Diamond & Polyamide |
| Liner Color | White |
| Gauge | 15G |
| Palm Thickness | 0.90 mm |




PU Coated Cut Resistant Gloves

Series 181



SanCut 181743

| | |
|----------------|-----------------------------|
| Coating | Micro Foam PU |
| Coating Color | Grey |
| Liner | Dyneema Diamond & Polyamide |
| Liner Color | Blue & White Melange |
| Gauge | 15G |
| Palm Thickness | 0.90 mm |



Series 191

General Properties

High fingertip sensitivity cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.


Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.



SanCut 191732


| | |
|----------------|--------------------------------|
| Coating | Micro Foam PU |
| Coating Color | Black |
| Liner | Steel Fiber & HPPE & Polyester |
| Liner Color | Blue & Black Melange |
| Gauge | 18G |
| Palm Thickness | 0.70 mm |






SanCut 191733

| | |
|----------------|--------------------------------|
| Coating | Micro Foam PU |
| Coating Color | Black |
| Liner | Steel Fiber & HPPE & Polyester |
| Liner Color | Black & White Melange |
| Gauge | 18G |
| Palm Thickness | 0.70 mm |



SanCut 191734

| | |
|----------------|--------------------------------|
| Coating | Micro Foam PU |
| Coating Color | Black |
| Liner | Steel Fiber & HPPE & Polyester |
| Liner Color | Black & White Melange |
| Gauge | 18G |
| Palm Thickness | 0.75 mm |



PU Coated Cut Resistant Gloves

Series **191**



SanCut 191746

| | |
|----------------|--|
| Coating | Micro Foam PU |
| Coating Color | Grey |
| Liner | Steel Fiber & HPPE & Polyamide & Glass Fiber |
| Liner Color | Black & White Melange |
| Gauge | 18G |
| Palm Thickness | 0,90 mm |



General Properties

It is produced by coating PU on a thin and heat-resistant HPPE fiber and polyester blend lining. TDM 100 provides D level cut resistance according to ISO 13997 test. It makes it easier to hold dry and less oily parts compared to holding with bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.

Areas of Usage

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications



SanFit 101744

| | |
|----------------|-------------------------------------|
| Coating | Polyurethane |
| Coating Color | Grey |
| Liner | Steel Fiber, HPPE, Polyester, Coton |
| Liner Color | Black-White & Yellow Melange |
| Gauge | 13G |
| Palm Thickness | 1,15 mm |



Nitrile Foam Coated Cut Resistant Gloves

Series **331**

General Properties

Usable under dry and low-oil working conditions where there is a risk of cuts. Offers a comfortable working opportunity as it has a thin structure and fits well hands.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 331732

| | |
|----------------|-------------------------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | HPPE Spun & Polyester & Glass Fiber |
| Liner Color | Black & White Melange |
| Gauge | 15G |
| Palm Thickness | 1,00mm |



High Resistance ■ High Degree of Gripping ■ Compatible with Use on Touch Screens



Nitrile Foam Coated Cut Resistant Gloves

Series **331**



SanCut 331734

| | |
|----------------|-------------------------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | HPPE Spun & Polyester & Glass Fiber |
| Liner Color | Black & White Melange |
| Gauge | 13G |
| Palm Thickness | 1,00 mm |



SanCut 331334

| | |
|----------------|-------------------------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | HPPE Spun & Polyester & Steel Fiber |
| Liner Color | Black |
| Gauge | 13G |
| Palm Thickness | 1,10 mm |



Nitrile Foam Coated Cut Resistant Gloves

Series **341**

General Properties

Double layer knitting with specially designed and reinforced yarns against cut. High grip NBR foam coating and very good dexterity.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 341734

| | |
|----------------|--------------------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | HPPE & Glass Fiber & Polyamide |
| Liner Color | Navy Blue & White Melange |
| Gauge | 18G |
| Palm Thickness | 1.00 mm |



Series **351**

General Properties

Combination of foam nitrile coating that has a higher degree of gripping, with aramid knit that is thin and resistant to heat and cuts.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 351734

| | |
|----------------|----------------------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | Aramid & Steel Fiber & Polyester |
| Liner Color | Yellow & Black Melange |
| Gauge | 15G |
| Palm Thickness | 1,10 mm |



High Resistance ■ High Degree of Gripping ■ Compatible with Use on Touch Screens



Nitrile Foam Coated Cut Resistant Gloves

Series **381**

General Properties

Precision working gloves; made of dyneema liner, light, comfortable, durable and allowing for maximum mobility, higher degree of gripping, resistant to cuts.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 381632

| | |
|----------------|-----------------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | Dyneema Diamond & Polyamide |
| Liner Color | Blue & White Melange |
| Gauge | 18G |
| Palm Thickness | 0,90 mm |



SanCut 381633

| | |
|----------------|-----------------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | Dyneema Diamond & Polyamide |
| Liner Color | Navy Blue & White Melange |
| Gauge | 18G |
| Palm Thickness | 1,00 mm |



Nitrile Foam Coated Cut Resistant Gloves

Series **391**

General Properties

High grip cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 391732

| | |
|----------------|--|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | Steel Fiber & HPPE & Polyester Blue & White Melange |
| Liner Color | 18G |
| Gauge | 0.90 mm |
| Palm Thickness | |



SanCut 391733

| | |
|----------------|---|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | Steel Fiber & HPPE & Polyester Black & White Melange |
| Liner Color | 18G |
| Gauge | 0.90 mm |
| Palm Thickness | |



Thin ■ High Resistance ■ High Degree of Gripping



Nitrile Foam Coated Cut Resistant Gloves

Series **391**



SanCut 391734

| | |
|----------------|--------------------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | Steel Fiber & HPPE & Polyester |
| Liner Color | Black & White Melange |
| Gauge | 18G |
| Palm Thickness | 0,95 mm |



EN 21420

EN 388:2016



4X44D



General Properties

Gloves lining manufactured using cut resistant threads. High level of flexibility and permeability.

Areas of Usage

Surface control treatments, general usage, special applications.



SanCut 040703

| | |
|----------------|--|
| Coating | Uncoated |
| Liner | HPPE Spun & Polyester & Glass Fiber & Spandex |
| Liner Color | Black & White Melange |
| Gauge | 13G |
| Palm Thickness | 0,80 mm |



SanCut 030704

| | |
|----------------|--|
| Coating | Uncoated |
| Liner | HPPE Spun & Steel Fiber Black & White Melange |
| Liner Color | 13G |
| Gauge | 0,80 mm |
| Palm Thickness | |



Breathable



Uncoated Gloves



SanCut 050103

| | |
|----------------|--|
| Coating | Uncoated |
| Liner | Aramid, Glass Fiber, Flame Resistant Acrylic |
| Liner Color | Yellow |
| Gauge | 13G |
| Palm Thickness | 1,03 mm |



EN 420



1X43C



X1XXXX

Special Purpose Gloves

General Properties

Glove liners manufactured using cut resistant threads, with finger bottoms softened. These gloves offer a level D cut-resistance, and the finger sections are easily removable. This ensures that the finger sections are easily removed when being caught while working.

Areas of Usage

Surface control treatments, general usage, special applications.



SanCut 096704

| | |
|----------------|----------------------------|
| Coating | Uncoated |
| Liner | HPPE & Nylon & Steel Fiber |
| Liner Color | Black & White Melange |
| Gauge | 18G |
| Palm Thickness | 0.60 mm |



EN 420



4X44D





SanCut 396734

| | |
|----------------|----------------------------|
| Coating | Foam Nitrile |
| Coating Color | Black |
| Liner | HPPE & Steel Fiber & Nylon |
| Liner Color | Black & White Melange |
| Gauge | 18G |
| Palm Thickness | 1.1 mm |



Series **196**

General Properties

It is produced by applying polyurethane coating on HPPE lining reinforced with stainless steel fiber. It is designed for special applications. While TDM 100 provides D level cut resistance according to ISO 13997 test, it does not compromise fingertip sensitivity. The finger parts of the glove are designed to break easily if caught somewhere.

Areas of Usage

Surface control treatments, general usage, special applications.



SanCut 196734

| | |
|----------------|--|
| Coating | Micro Foam PU |
| Coating Color | Black |
| Liner | HPPE & Nylon & Polyester & Steel Fiber |
| Liner Color | Black & White Melange |
| Gauge | 18G |
| Palm Thickness | 0,90 mm |



Chemical Gloves

Applications

- ☐ Paint Shops
- ☐ Chemical Plants
- ☐ Pharmaceutical Industry
- ☐ Laboratory And Health Sector





NL 15

Nitrile Gloves

| | |
|------------------|----------------------------------|
| Material | Acrylonitrile & Butadiene Rubber |
| Internal Coating | Yes (Flock) |
| Thickness | 0,42 mm |
| Length | 32 cm |



EN 420

EN 388:2016



4101X

EN 374



AJKLOT



NEO400

Neoprene Chemical Gloves

| | |
|------------------|------------------------------|
| Material | Chloroprene & Natural Rubber |
| Internal Coating | Yes (Flock) |
| Thickness | 0,70 mm |
| Length | 33 cm |



EN 420

EN 388:2016



2111X

EN 374



BKLDPT

Chemical Gloves Selection Guide



| CHEMICALS | NEO400 | | NL15 | |
|---------------------------------|-------------------|-------------------|-------------------|-------------------|
| | AVERAGE BTT (Min) | Performance Ratio | AVERAGE BTT (Min) | Performance Ratio |
| 1. Acetaldehyde, 99,5% | 8 | Weak | | - |
| 2. Acenic Acid, 99+% | 152 | Perfect | | - |
| 3. Acetone, 99,5% | 11 | Suitable | 5 | Not Recommend |
| 4. AcetoNitrile, 99% | 15 | Perfect | 5 | Weak |
| 5. Acrylic Acid, 99% | 66 | Weak | | - |
| 6. Ammonuim Flouride, 40% | >480 | Perfect | >480 | Perfect |
| 7. Ammonuim Hydroxide, 85% | >480 | Perfect | 320 | Good |
| 8. Amyl Acetate, 100% | | Perfect | | - |
| 9. Amyl Alcohol, 99+% | | Perfect | | Perfect |
| 10. Aniline, 99 + % | 138 | Weak | >480 | Perfect |
| 11. Aqua Regia | >480 | Perfect | 10 | Not Recommend |
| 12. Benzaldehyde, 99,5% | | - | 280 | Perfect |
| 13. Bromopropionic Acid Sat. | >480 | Perfect | 5 | Not Recommend |
| 14. Butyl Acetate, 99+% | | - | >480 | Good |
| 15. Butyl Alcohol, 99% | 135 | Perfect | >480 | Perfect |
| 16. Butyl Cellosolve, 99% | 63 | Good | >480 | Perfect |
| 17. Butyrolactone, 99% | 170 | Perfect | | - |
| 18. Carbon Disulfide, 99,9% | | - | 10 | Weak |
| 19. Carbon Tetrachloride, 99+% | | - | >480 | Good |
| 20. Cellosolve Acetate, 99+% | 37 | Not Recommend | | - |
| 21. Chromic Acid, 50% | | - | >480 | Good |
| 22. Citric Acid, 10% | >480 | Perfect | >480 | Good |
| 23. Cyclohexanol, 98% | 392 | Perfect | >480 | Good |
| 24. Diacetone Alcohol, 99% | 96 | Perfect | 180 | Suitable |
| 25. Dibutyl Phthalate, 99% | >480 | Good | >480 | Perfect |
| 26. Diethylamine, 99+% | | - | 5 | Weak |
| 27. Diisobutyl Ketone, 80% | | - | >480 | Good |
| 28. Dimethyl Acetamide, 99+% | | - | | - |
| 29. N,N-Dimethylformamide, 99+% | 38 | Suitable | | - |
| 30. Dimethyl Sulfoxide, 99+% | 243 | Suitable | | - |
| 31. Dioctyl Phthalate, 99% | >480 | Good | >480 | Suitable |
| 32. 1, 4-Dioxane, 99,9% | | - | | - |
| 33. Epichlorohydrin, 99+% | | - | | - |
| 34. Ethyl Acetate, 99+% | 10 | Not Recommend | 5 | Not Recommend |
| 35. Ethyl Alcohol, 90% | 73 | Perfect | 293 | Perfect |
| 36. Ethyl Ether, 99% | 4 | Not Recommend | | - |
| 37. Ethyl Glycol Ether, 99% | 68 | Perfect | >480 | Good |
| 38. Ethylene Glycol, 99% | >480 | Perfect | | - |
| 39. Formaldehyde, 99% | >480 | Perfect | >480 | Perfect |
| 40. Formic Acid, 95+% | >480 | Perfect | | - |
| 41. Freon TF, 99+% | 160 | Not Recommend | >480 | Good |
| 42. Furfural, 99% | 35 | Suitable | | - |
| 43. Gasoline, White, 100% | | - | >480 | Perfect |
| 44. Gluterlaldehyde, 5% | | - | >480 | Perfect |
| 45. Hexamethyldisilazine, 97% | 153 | Weak | >480 | Perfect |
| 46. Hexane, 99+% | 16 | Not Recommend | >480 | Good |
| 47. Hydrazine, 65% | 205 | Perfect | 388 | Good |
| 48. Hydrochloric Acid, 10% | >480 | Perfect | >480 | Good |
| 49. Hydrochloric Acid, 38% | >480 | Perfect | | - |
| 50. Hydrofluoric Acid, 48% | >480 | Perfect | >480 | Good |
| 51. Hydrogen Peroxide, 30% | >480 | Perfect | >480 | Good |

■ Perfect
 ■ Good
 ■ Suitable
 ■ Weak
 ■ Not Recommend

Chemical Gloves Selection Guide



| CHEMICALS | NEO400 | | NL15 | |
|------------------------------------|-------------------|-------------------|-------------------|-------------------|
| | AVERAGE BTT (Min) | Performance Ratio | AVERAGE BTT (Min) | Performance Ratio |
| 52. Hydroquinone, Sat. | >480 | Perfect | >480 | Suitable |
| 53. Isobutyl Alcohol, 99+% | 183 | Perfect | >480 | Good |
| 54. Iso-Octane, 99% | 92 | Not Recommend | >480 | Good |
| 55. Isopropyl Alcohol, 99+% | 142 | Perfect | >480 | Good |
| 56. Kerosene, 100% | 100 | Not Recommend | >480 | Perfect |
| 57. Lactic Acid, 85% | >480 | Perfect | >480 | Good |
| 58. Lauric Acid, 36% | >480 | Good | >480 | Good |
| 59. Maleic Acid, Saturated | >480 | Perfect | >480 | Good |
| 60. Methyl Alcohol, 99.9% | 40 | Perfect | - | - |
| 61. Methylamine, 40% | 79 | Perfect | 480 | Suitable |
| 62. Methyl t-Butyl Ether, 99,8% | - | - | 393 | Good |
| 63. Methyl Cellosolve, 99% | 75 | Perfect | - | - |
| 64. Methyl Ethyl Ketone, 99+% | - | - | - | - |
| 65. Mineral Spirits, Rule 66, 100% | 67 | Not Recommend | >480 | Good |
| 66. Monoethanolamine, 99% | >480 | Perfect | >480 | Perfect |
| 67. Morpholine, 99% | - | - | - | - |
| 68. Muriatic Acid, 100% | - | - | >480 | Good |
| 69. Naptha VM & P, 100% | 35 | Not Recommend | >480 | Perfect |
| 70. N-Methyl-2-Pyrrolidone, 99+% | - | - | - | - |
| 71. Nitric Acid, 10% | >480 | Perfect | >480 | Good |
| 72. Nitric Acid, 70% | 370 | Good | - | - |
| 73. Nitrobenzene, 99% | - | - | - | - |
| 74. Nitromethane, 95.5% | 22 | Perfect | - | - |
| 75. Nitropropane, 95.5% | 26 | Weak | - | - |
| 76. Octyl Alcohol, 99+% | 275 | Perfect | >480 | Good |
| 77. Oleic Acid, 99+% | >480 | Perfect | >480 | Good |
| 78. Oxalic Acid, 12.5% | >480 | Perfect | >480 | Good |
| 79. Palmitic Acid, Sat. | >480 | Perfect | - | - |
| 80. Pentachlorophenol, 35% | >480 | Perfect | - | - |
| 81. Pentane, 98% | 13 | Not Recommend | >480 | Perfect |
| 82. Perchloric Acid, 60% | >480 | Perfect | >480 | Suitable |
| 83. Phenol, 90% | 108 | Good | - | - |
| 84. Phosphoric Acid, 85% | >480 | Perfect | >450 | Suitable |
| 85. Potassium Hydroxide, 50% | >480 | Perfect | >480 | Suitable |
| 86. Propyl Acetate, 99% | - | - | - | - |
| 87. Propyl Alcohol, 96+% | 75 | Perfect | >480 | Good |
| 88. Pyridine, 99% | - | - | - | - |
| 89. Rubber Solvent, 100% | 15 | Not Recommend | >480 | Good |
| 90. Sodium Hydroxide, 50% | >480 | Good | >480 | Suitable |
| 91. Stoddard Solvent, 99% | 62 | Not Recommend | >480 | Good |
| 92. Sulfuric Acid, 47% | >480 | Perfect | >480 | Suitable |
| 93. Sulfuric Acid, 95% | 260 | Perfect | - | - |
| 94. Tannic Acid, 37.5% | >480 | Perfect | >325 | Good |
| 95. 1,1,2,2-Tetrachloroethane, 99% | - | - | - | - |
| 96. Tetrachloroethylene, 100% | - | - | 350 | Not Recommend |
| 97. Toluene, 99+% | - | - | 19 | Weak |
| 98. 1,1,1-Trichloroethane | - | - | - | - |
| 99. Tricresyl Phosphate, 90% | - | Good | 330 | Suitable |
| 100. Triethanolamine, 85% | - | - | - | - |
| 101. Turpentine, 100% | - | - | >480 | Suitable |
| 102. Xylene, 99% | - | - | 64 | Suitable |

■ Perfect
 ■ Good
 ■ Suitable
 ■ Weak
 ■ Not Recommend





Safety Helmet



General Features

Products with EN 397 standard should be used for head protection. Different color options can be preferred in order to the employees in different departments in the enterprises (Blue, White, Yellow, Green, Red, Orange)

In metal splashes, attention should be paid to the MM sign while selecting the helmet.

Applications

- ❑ Automotive
- ❑ Construction
- ❑ Metal industry
- ❑ Logistic
- ❑ Shipyards





EB01

Safety Helmet - Manuel

- Bidirectional ventilation hole provides maximum comfort
- Thanks to adjustable neckband, it can adjust for head sizes manually.
- Rain gutter available
- Use with headphones and viewfinder

Areas of Usage

Construction Sector, Logistics Sector, Automotive Industry



EB02

Safety Helmet with ratchet

- Bidirectional ventilation hole provides maximum comfort
- Thanks to adjustable neckband, it can adjust for head sizes
- Rain gutter available
- Use with headphones and viewfinder

Areas of Usage

Construction Sector, Logistics Sector, Automotive Industry

Dust Masks



General Features

It can be folded and conically divided into two models. The conical models fit in a wide range of face sizes with outwardly protruding shape. Foldable models provide easy storage and prevent contamination. Dust masks are classified as protection class FFP1, FFP2 and FFP3.

Applications

- ☐ Automotive
- ☐ Build
- ☐ Cement
- ☐ Mine
- ☐ Food
- ☐ Medicine
- ☐ Welding Works





SMC

Series of Dust Masks

- Reinforced body structure
- Improved comfort nose clip does not break its structure when used again
- Maximum comfort thanks to nose support
- There are FFP1 and FFP2 Protection Levels
- Thanks to improved ventilation system hot air and breath out easily
- It has a dolamit test
- It has high filtration and low respiratory resistance
- Easy to carry, foldable mask

Models

- SMC 01 FFP1, NR, D
- SMC 11 FFP1, NR, D Valve
- SMC 11S FFP1, NR, D Valve, Nose Support
- SMC 12S FFP2, NR, D Valve, Nose Support



SME

Series of Dust Masks

- It has rubber structure and it doesn't contain latex
- Improved comfort nose clip does not break its structure when used again
- There are FFP1, FFP2 and FFP3 Protection Levels
- Thanks to improved ventilation system hot air and breath out easily.
- It has a dolamit test.
- It has high filtration and low respiratory resistance.
- Easy to carry, foldable mask.

Models

- SME 01 FFP1, NR, D
- SME 11 FFP1, NR, D, Valve
- SME 12 FFP2, NR, D, Valve
- SME 13S FFP3, NR, D, Valve, Nose Support



SMA

Series of Dust Masks

- It has rubber structure and it doesn't contain latex
- It has a very good insulation structure without clips in the nose area
- It has dolamit test
- Thanks to improved ventilation system hot air and breath out easily
- It has high filtration and low respiratory resistance
- Easy to carry, foldable mask

Models

- SMA 11 FFP1, NR, D, Valve
- SMA 12S FFP2, NR, D, Valve, Nose Support





ADHESIVE TAPES

Adhesive Tapes



Packaging Tapes

Product Features

General purpose packaging tape.

It is suitable for light and medium weight carton closure.

Suitable for use with hand-held dispenser and automatic packaging machines

Can be produced at any desired width and length



| Product Code | Carrier | Adhesive Type | Color | Thickness | Elongation (%) | Temperature Resistance (°C) | Application Areas |
|--------------------|-------------|------------------|-----------------------------|-----------|----------------|-----------------------------|---------------------------------|
| Sander PP5231 | BOPP | Synthetic Rubber | Transparent / Brown / White | 25 mic. | 145 | 60 | General purpose packaging tape. |
| Egebant PP31 | BOPP | Synthetic Rubber | Transparent / Brown / White | 28 mic. | 145 | 60 | General purpose packaging tape. |
| Egebant PP30S | BOPP | Natural Rubber | Transparent / Brown / White | 28 mic. | 145 | 60 | General purpose packaging tape. |
| Egebant PP35 | BOPP | Natural Rubber | Transparent / Brown / White | 35 mic. | 145 | 60 | General purpose packaging tape. |
| Egebant PVC 330 | PVC | Natural Rubber | Transparent / Brown / White | 33 mic. | 145 | 60 | General purpose packaging tape. |
| Egebant Kraft Tape | Kraft Paper | Natural Rubber | Brown | 105 mic. | 6 | 60 | General purpose packaging tape. |



Masking Tapes

Product Features

- Can be removed without leaving a residue
- Solvent-resistant
- Temperature resistance
- Easy tear
- Controlled expansion
- Conformability to stretch and adhere round curves
- High initial adhesion



| Product Code | Carrier | Adhesive Type | Thickness | Temperature Resistance (°C) | Application Areas |
|-----------------|------------------------|----------------|-----------|-----------------------------|--|
| Sander 6127 | Crepe Paper | Natural Rubber | 110 mic. | 30 | General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling. |
| Egebant MSK60 | Crepe Paper | Natural Rubber | 125 mic. | 80 (30') | General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling. |
| Egebant MSK6280 | Crepe Paper | Natural Rubber | 130 mic. | 100 (30') | High heat resistance, wet sanding and tiner-like chemical resistance, a general purpose masking tape. Up to 100 degree heat resistance. |
| Egebant MSK100 | Waterproof Crepe Paper | Natural Rubber | 140 mic. | 120 (30') | General purpose masking tape. Very high heat resistance, resistant to wet sanding and filling materials, thinner infrared light, durable and resistant to chemicals. Up to 120 degrees heat resistance |
| Egebant P40 | PET | Silicon | 60 mic. | 180 (30') | High-Temperature powder paint masking tape. |
| Egebant 6268 | Crepe Green Paper | Natural Rubber | 125 mic. | 80 (30') | General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling. |
| Egebant 6265 | Crepe Blue Paper | Natural Rubber | 125 mic. | 80 (30') | General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling. |
| Egebant 6267 | Crepe Orange Paper | Natural Rubber | 125 mic. | 80 (30') | General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling. |
| Maskopri | Paper HDPE Film | Natural Rubber | 125 mic. | 80 (30') | The film is electrostatically loaded to stick to whole surface. Recommended for professional, industrial and DIY applications. |

Egebant Colored Masking Tape



| Product Code | Colors | Adhesive Type | Temperature Resistance (°C) | Application Areas |
|-----------------|----------------------------|----------------|-----------------------------|--|
| Egebant 25 x 50 | Blue, Orange, Green, White | Naturel Rubber | 80 | General purpose masking tape. Construction industry, automotive industry, white goods industry and cable bundling. |
| Egebant 50 x 50 | | | | |

Duct Tapes

Product Features

- Hand-tearable
- Moisture resistant
- Can adhere to most surfaces
- High tensile strength
- Waterproof, suitable for many repair applications.



| Product Code | Carrier | Adhesive Type | Color | Thickness | Elongation (%) | Temperature Resistance (°C) | Application Areas |
|----------------|-----------------|------------------|----------------------|-----------|----------------|-----------------------------|--|
| Egebant TPL201 | PE Coated Cloth | Synthetic Rubber | Black / White / Gray | 180 mic. | 10 | 60 | It is a general purpose cloth tape. |
| Egebant TPL204 | PE Coated Cloth | Synthetic Rubber | Gray | 155 mic. | 13 | 60 | It is a multi-purpose, single-sided repair tape. |
| Egebant CTI604 | PE | Synthetic Rubber | Gray | 160 mic. | 10 | 60 | General purpose cloth tape. |

Strapping Tapes

Product Features

No residue left on the surface after sticking.

Used for strapping plastic and metal parts in White Goods Industry.

High UV resistance.



| Product Code | Carrier | Adhesive Type | Color | Thickness | Temperature Resistance (°C) | Application Areas |
|---------------|---------|----------------|--------------|-----------|-----------------------------|---------------------------------|
| Egebant PP505 | MOPP | Natural Rubber | White | 70 mic. | 60 | General-purpose strapping tape. |
| Egebant PP550 | MOPP | Natural Rubber | Blue / White | 55 mic. | 60 | General-purpose strapping tape. |
| Egebant PP855 | MOPP | Natural Rubber | Blue | 113 mic | 60 | General-purpose strapping tape. |
| Egebant PP850 | MOPP | Natural Rubber | Blue / White | 113 mic. | 60 | General-purpose strapping tape. |

Filament Tapes

Product Features

Reinforced with glass fiber packaging and bundling tape.



| Product Code | Carrier | Adhesive Type | Color | Thickness | Elongation (%) | Temperature Resistance (°C) | Application Areas |
|---------------|---------------------------------|------------------|---------------|-----------|----------------|-----------------------------|--|
| Egebant FG10 | Reinforced with fiberglass BOPP | Synthetic Rubber | Clear / White | 120 mic. | | 60 | Flat braided, palletizing tape |
| Egebant FGBD | Reinforced with fiberglass BOPP | Synthetic Rubber | Clear / White | 120 mic. | | 60 | Cross-linked palletizing tape |
| Egebant ST300 | MOPP | Synthetic Rubber | Clear | 50 mic. | | 60 | Food and beverage packages transport band is used as |
| Egebant GL96 | Fiberglass | Silicon | White | 165 mic. | 3,5 | 250 | Glass fiber with high temperature resistance, one side is reinforced cloth tape. |

Aluminium Tapes

Product Features

High resistance to moisture and chemicals

Thermal conductivity

Heat and light reflectance

Flame resistance

Strength of the external environment

Vibration damping and isolation



| Product Code | Carrier | Adhesive Type | Color | Thickness | Tensile Strength | Temperature Resistance (°C) | Application Areas |
|----------------|-----------------|---------------|---------------|-----------|------------------|-----------------------------|--|
| Egebant AF1825 | Al.Foil | Acrylic | Metallic Gray | 18 mic. | 40 | 150 | 18 mic. Aluminium tape |
| Egebant AF3025 | Al.Foil | Acrylic | Metallic Gray | 30 mic. | 40 | 150 | 30 mic. Aluminium tape |
| Egebant AF4025 | Al. Foil | Acrylic | Metallic Gray | 40 mic. | 40 | 150 | 40 mic. Aluminium tape |
| Egebant AF5025 | Al. Foil | Acrylic | Metallic Gray | 50 mic. | 40 | 150 | 50 mic. Aluminium tape |
| Egebant AF7525 | Al. Foil | Acrylic | Metallic Gray | 75 mic. | 60 | 150 | 75 mic. Aluminium tape |
| Egebant TT9934 | Al. Foil | Acrylic | Metallic Gray | 150 mic. | 275 | 150 | 150 mic. Aluminium tape |
| Egebant TT9940 | BOPP - Al. Foil | Acrylic | Metallic Gray | 90 mic. | 105 | 150 | It is a BOPP coated adhesive aluminium tape having high tensile strength. Used in white goods sector and aluminium panels bonding. |
| Egebant AF5025 | VL-Al.Foil | Acrylic | Metallic Gray | 90 mic. | 40 | 120 | HVAC |

Double Sided Tapes

Product Features

High initial adhesion

Easy to tear by hand

Designed to bond to low surface energy plastic



| Product Code | Carrier | Adhesive Type | Color | Thickness (mic.) | Temperature Resistance (°C) | Application Areas |
|--------------------|-----------|------------------|-------------|------------------|-----------------------------|---|
| Egebant TNT710 | Non Woven | Synthetic Rubber | Translucent | 100 | 60 | Usually laminated foam operations, cardboard, metal and adding used. |
| Egebant D022A | Non Woven | Acrylic | Translucent | 100 | 120 | For general purposes, wood, metal, glass, paper, plastic used for welding |
| Egebant 6750 | Non Woven | Acrylic | Blue | 100 | 200 | Has a high initial adhesive strength and high-speed coil Adding used |
| Egebant 8160 | PET | Acrylic | Clear | 120 | 100 | General purpose |
| Egebant D5082 | PET | Acrylic | Clear | 100 | 90 | General purpose |
| Egebant D5028 | PET | Acrylic | Clear | 125 | 90 | General purpose |
| Egebant D2040 | PET | Acrylic | Clear | 95 | 90 | General purpose |
| Egebant TNT710/160 | Non Woven | Synthetic Rubber | Translucent | 160 | 60 | Laminated foam operations, cardboard and general purpose |
| Egebant VX160 | Non Woven | Synthetic Rubber | Translucent | 160 | 60 | Laminated foam operations, cardboard and general purpose |
| Egebant H-09 | Non Woven | Synthetic Rubber | Translucent | 80 | 60 | Laminated foam operations, cardboard and general purpose |
| Egebant 90HX | Non | Acrylic | White | 110 | 90 | Cross Linked Transfer Tape |

Film Backing Tapes

Product Features

Ease of use

PVC, PET, cloth, fabric and OPP carriers

Kinds of acrylic and rubber adhesive

High and low surface energy good adhesion to the product

High initial adhesion force



| Product Code | Carrier | Adhesive Type | Color | Thickness (mic.) | Temperature Resistance (°C) | Application Areas |
|----------------|---------|------------------|-------------|------------------|-----------------------------|--------------------------------------|
| Egebant RDA700 | OPP | Synthetic Rubber | Clear | 98 | 60 | General purpose |
| Egebant PT150 | PET | Modified Acrylic | Translucent | 150 | 120 | Bonding of metal panels and mirrors. |
| Egebant PT205 | PET | Modified Acrylic | Translucent | 205 | 120 | Bonding of metal panels and mirrors. |

Foam Tapes

Product Features

Flexibility and space-filling

Bonding rough or irregular surfaces

Vibration and noise isolation

Impact resistance

Heat resistance



| Product Code | Carrier | Adhesive Type | Color | Thickness (mm) | Temperature Resistance (°C) | Application Areas |
|----------------|-----------------------|---------------|-------------|----------------|-----------------------------|---|
| Egebant FT 67 | PE Foam | Acrylic | White | 1,0 | 90 | General purpose bonding solutions used in outdoor environments. |
| Egebant FT 67 | PE Foam | Acrylic | Black | 1,0 | 90 | General purpose bonding solutions used in outdoor environments. |
| Egebant 1100R+ | Modified Acryled Foam | Acrylic | White | 1,1 | 120 | General purpose bonding solutions used in outdoor environments. |
| Egebant 71100 | Modified Acryled Foam | Acrylic | Black/White | 1,1 | 120 | General purpose bonding solutions used in outdoor environments. |
| Egebant 640R+ | Modified Acryled Foam | Acrylic | White | 0,64 | 120 | General purpose bonding solutions used in outdoor environments. |
| Egebant 70080 | Modified Acryled Foam | Acrylic | Black/Gray | 0,8 | 120 | General purpose bonding solutions used in outdoor environments. |
| Egebant 500R | NON | Acrylic | Transparent | 0,5 | 120 | General purpose bonding solutions used in outdoor environments. |
| Egebant 1000R | NON | Acrylic | Transparent | 1,0 | 120 | General purpose bonding solutions used in outdoor environments. |

Pe Freezer Tapes



| Product Code | Carrier | Adhesive Type | Color | Thickness | Tensile Strength | Adhesive N/25mm | Application Areas |
|----------------|---------|---------------|-------|-----------|------------------|-----------------|--|
| Egebant TT6405 | LDPE | Syn. Rubber | White | 73 mic. | 28 | 13 | Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold. |
| Egebant TT6400 | LDPE | Syn. Rubber | White | 85 mic. | 30 | 20 | Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold. |

Isolation Plate

Product Features

Adhesive laminated Polycarbonate or PVC plates, to isolate electronic components, in electronic devices.



Refrigerator Back Carton Plates

Product Features

Aluminium and PE laminated carton for refrigerator back panels. Can be converted in different dimensions and shapes.






Isolation Foam

Product Features

Adhesive laminated Polyurethane or Silicone strips for TV production.

Different friction and shore levels


Can be converted into different lengths and widths

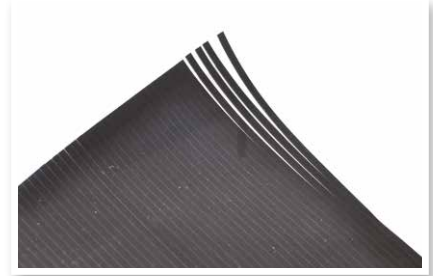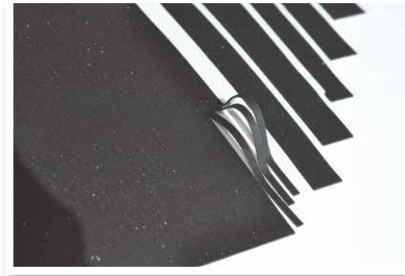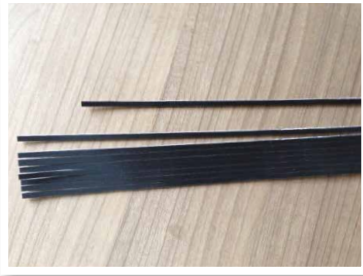

Die-Cut Kiss-Cut Product

Product Features

Adhesive laminated foams. Die cut, kiss cut, double sided tape, Aluminium Tapes.

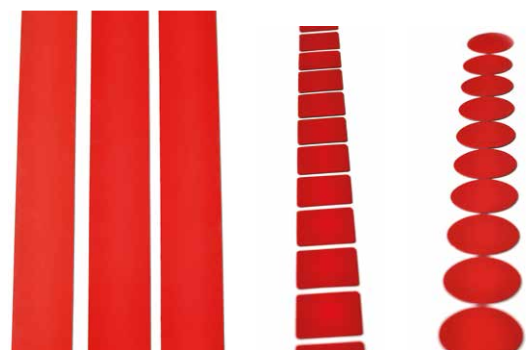





ABRASIVES

www.egebant.com.tr

Abrasives



Abrasive Belts / Wide Belts

Product Features

Suitable for all sanding and grinding operations: with unsupported belt, sander pad and contact wheel


Special designs for customised applications, e.g. for furniture production to enable fast and clean preparation of large surfaces ready for painting

Wide range of sizes

Paper and cloth backed

All products with high tensile strength and optimum stretching resistance

Joint types



Overlap joint

Double skived joint

Zigzag film joint

Film joint

Film on top joint

Segmented Belts

Product Features

Its strong polyester backing and sharp silicon carbide mineral provide superior performance in materials such as chipboard, MDF, HDF, and OSB.

Its special backing structure provides long life and high-performance.

Applications

- ☐ Steel
- ☐ Wood
- ☐ Stainless Steel
- ☐ Paint / Varnish / Filler
- ☐ NF Metal
- ☐ Plastic
- ☐ Glass



| Grain | Backing | Coating |
|-------------------------|--------------------|-----------|
| Aluminium Oxide | D, F, G paper | Open |
| Zirconia Alumina | J, JF, X, XF Cloth | Semi-Open |
| Ceramic Aluminium Oxide | Y, Z Polyester | Close |
| Silicon Carbide (SiC) | Film | |

- ☐ Custom sizes available



Applications

- ☐ Calibrating, intermediate sanding and finishing



Materials

- ☐ Chipboard
- ☐ OSB board MDF and HDF board

| Grain | Backing | Coating | Grits |
|-----------------------|----------------------|-----------|--------|
| Silicon Carbide (SiC) | Y Polyester Paper | Semi-Open | 24-180 |

Velcro / Psa Discs

Product Features


Suitable for orbital and rotary machines. These sandpapers, which have a wide range of sizes and holes, are suitable for wet and dry use, and also have cloth and film backing options.




Applications

- ☐ Steel
- ☐ Stainless Steel
- ☐ Wood
- ☐ Paint / Varnish / Filler
- ☐ Plastic
- ☐ Metals
- ☐ Glass
- ☐ Stone


| Grain | Backing | Coating |
|-------------------------|---------------------|-----------|
| Aluminium Oxide | B, C, D, E, F paper | Semi-Open |
| Zirconia Alumina | X, JF Cloth | Close |
| Ceramic Aluminium Oxide | Film | |
| Silicon Carbide (SiC) | | |




D1
9 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D2
8 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D3
6 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D4
8 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm



D5
8 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm



D6
8 Holes (Outside)
6 Holes (Inside)
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm



D7
8 Holes (Outside)
8 Holes (Inside)
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm
1 hole in the center

Foam and Sponge Sanding Pads/Discs

Product Features

Flexible abrasives for countered surfaces

Due to its sponge backing, suitable for all profile surfaces

| Dimension | Type | Grit Range |
|----------------------|-------------------|--|
| 96x66x25 mm | Pad | 36-400 |
| 96x123x12,5mm | Pad | 36-400 |
| 115x140x5mm | Pad | Medium, Fine, Super Fine, Ultra Fine, Micro Fine |
| Diameter: 150 Velcro | Flat - Perforated | Medium, Fine, Super Fine |



Foam-Backed Abrasive Rolls

Product Features

High quality flexible aluminium oxide abrasive rolls.

Due to its foam backing, suitable for all surfaces.

Very good performance on most woods, paint, varnish and lacquer.

| Dimension | Grit Range | Unit |
|---------------|------------|------|
| 115 mm x 25 m | 40-1500 | 1 |



Flap Wheels

Flap Wheels

Product Features

Our flap wheels are used for stock removal, finishing, etc. on flat or different forms of surfaces. It is suitable for surface sanding operations. Thanks to its flexible leaf structure, it provides high performance on all kinds of surfaces.



Applications

- Paint / Varnish / Filler
- Wood
- Plastic
- Metals

| Grain | Backing |
|-----------------|--------------------|
| Aluminium Oxide | X Cloth - JF Cloth |

| Crit | 24-36-40 | 50-60 | 80-120 | 150-220 | 240-320 | 400 | Unit/Box |
|------|----------|-------|-----------|---------|---------|-----|----------|
| | | | 100 x 50 | | | | 2 |
| | | | 100 x 100 | | | | 1 |
| | | | 150 x 30 | | | | 1 |
| | | | 150 x 50 | | | | 1 |
| | | | 165 x 30 | | | | 3 |
| | | | 165 x 50 | | | | 2 |
| | | | 200 x 50 | | | | 1 |
| | | | 250 x 50 | | | | 1 |
| | | | 300 x 30 | | | | 1 |
| | | | 300 x 50 | | | | 1 |
| | | | 350 x 50 | | | | 1 |
| | | | 350 x 100 | | | | 1 |
| | | | 380 x 75 | | | | 1 |
| | | | 410 x 30 | | | | 1 |
| | | | 410 x 50 | | | | 1 |
| | | | 410 x 100 | | | | 1 |

Spindle Mounted Flap Wheels

Product Features

Suitable for use on metal and wood surfaces.



Applications

- Wood
- Plastic
- Metals

| Grain | Backing |
|-------------------------------------|--------------------|
| Aluminium Oxide- Silicon Carbide | X Cloth - JF Cloth |

| Crit | 40-80 | 100-180 | 220-320 | Unit/Box |
|------|-------|---------|-------------|----------|
| | | | 30 x 10 x 6 | 100 |
| | | | 30 x 15 x 6 | 100 |
| | | | 40 x 15 x 6 | 50 |
| | | | 40 x 20 x 6 | 50 |
| | | | 40 x 25 x 6 | 50 |
| | | | 40 x 30 x 6 | 50 |
| | | | 50 x 10 x 6 | 20 |
| | | | 50 x 15 x 6 | 20 |
| | | | 50 x 20 x 6 | 20 |
| | | | 50 x 25 x 6 | 20 |
| | | | 50 x 30 x 6 | 20 |
| | | | 50 x 40 x 6 | 20 |
| | | | 60 x 10 x 6 | 20 |
| | | | 60 x 15 x 6 | 20 |
| | | | 60 x 20 x 6 | 20 |
| | | | 60 x 25 x 6 | 20 |
| | | | 60 x 30 x 6 | 20 |
| | | | 60 x 40 x 6 | 10 |
| | | | 60 x 50 x 6 | 10 |
| | | | 80 x 15 x 6 | 10 |
| | | | 80 x 20 x 6 | 10 |
| | | | 80 x 25 x 6 | 10 |
| | | | 80 x 30 x 6 | 10 |
| | | | 80 x 40 x 6 | 9 |
| | | | 80 x 50 x 6 | 9 |

Threaded Flap Wheel

Product Features

Our threaded flap wheels are used for stock removal, finishing etc. on flat or different forms of surfaces. It is suitable for surface sanding operations. Thanks to its flexible leaf structure, it provides high performance on all kinds of surfaces.

Can be used on all standard angle grinders (80 m/s).

It can be easily removed and installed without the help of any tools.

Applications

- Paint
- Plastic
- Wood
- Metal



| Grain | Grit | Grit P40 - P120 | Unit/Box |
|-----------------|-------------|-----------------|----------|
| Aluminium Oxide | 115 x 20 mm | | 5 |

Slashed Flap Wheel

Product Features

It adapts to profiled surfaces thanks to its fringed leaves.

Applications

- Paint
- Wood
- Metals
- Plastic



| Grain | Backing |
|-----------------|--------------------|
| Aluminium Oxide | X Cloth - JF Cloth |

CSD Flap Wheels

Product Features

For removing paint, varnish and rust from seams, door jambs, drip moldings, pinchwelds and other difficult-to-reach areas.

Applications

- Metal
- Paint
- Plastic



| Grain | Color | Coating |
|-----------------------|--------|----------------|
| Silicon Carbide (SiC) | Black | 100 X 13 |
| | Blue | 150 X 13 |
| | Purple | 100 X 10 X 6 |
| | | 100 X 20 X 6 |
| | | 100 X 100 X 20 |

V-TYPE Flap Wheel

Product Features

It is suitable for sanding surfaces in corner welds and hard-to-reach spots. It is perfect for a wide range of jobs, from finishing to high stock removal, because of its wide selection of grit.

Applications

- Welding
- Metals

| Grain | Backing |
|----------------------------|---------|
| Zirconia - Aluminium Oxide | X-Cloth |



| Grit P40 - P400 | Unit / Box |
|-----------------|------------|
| 160 x 14mm | 10 |
| 160 x 20mm | 10 |

Nonwoven Flap Wheels

Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface.

Applications

- ▣ Fiberglass
- ▣ Metal
- ▣ Paint
- ▣ Plastic

Grain

Aluminum Oxide
Silicon Carbide (SiC)

| | | | |
|-----------|-----------|--------------|--------------|
| A. Coarse | A. Medium | A. Fine | A. Very Fine |
| S. Medium | S. Fine | S. Very Fine | S.U. Fine |



| Combi Flap | Unit / Box |
|------------|------------|
| 100 x 50 | 2 |
| 100 x 100 | 1 |
| 150 x 30 | 3 |
| 150 x 50 | 2 |
| 165 x 30 | 3 |
| 165 x 50 | 2 |
| 200 x 30 | 1 |
| 200 x 50 | 1 |
| 250 x 30 | 1 |
| 250 x 50 | 1 |
| 300 x 30 | 1 |
| 300 x 50 | 1 |
| 350 x 30 | 1 |
| 350 x 50 | 1 |
| 350 x 100 | 1 |
| 400 x 30 | 1 |
| 400 x 50 | 1 |
| 400 x 100 | 1 |

Spindle Mounted Nonwoven Flap Wheels

Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface. It is suitable for use with hand machines.

| | | | |
|-----------|-----------|--------------|--------------|
| A. Coarse | A. Medium | A. Fine | A. Very Fine |
| S. Medium | S. Fine | S. Very Fine | S.U. Fine |

| Spindle Mounted Nonwoven Mop | Spindle Mounted Combi-Mop | Unit / Box |
|------------------------------|---------------------------|------------|
| 40 x 20 x 6 | | 50 |
| 50 x 20 x 6 | | 20 |
| 50 x 30 x 6 | | 20 |
| 60 x 15 x 6 | | 20 |
| 60 x 30 x 6 | | 20 |
| 80 x 40 x 6 | | 9 |
| 80 x 50 x 6 | | 9 |



| Jewelry mop | Nonwoven | Combi | Abrasive |
|-------------|----------|-------|----------|
| | 100 x 10 | | |
| | 100 x 15 | | |
| | 100 x 20 | | |
| | 100 x 30 | | |

Nonwoven Rolls

Product Features

Suitable for hand use in surface development applications.

| Nonwoven Rolls | A. | Sic | Color |
|----------------|-------------------|------------|-------------|
| A.COARSE | S. | Sic | Black/Gray |
| A.MED | Z. | ZR | Blue |
| A.FINE | | | |
| A.V.FINE | Coarse | | P100 - P120 |
| S.MED | Medium | Medium | P180 - P220 |
| S.FINE | Fine | Thin | P280 - P320 |
| S.V.FINE | Very Fine | Very Thin | P320 - P360 |
| S.U.FINE | Ultra Fine | Ultra Thin | P500 - P600 |



Nonwoven Discs And Sheets



| Nonwoven | Sheet | Sheet | Disc Diameter | Unit / Box |
|----------|-----------|-----------|---------------|------------|
| A.COARSE | 230 x 280 | 158 x 224 | 150 | 10 |
| A.MED | | | | |
| A.FINE | | | | |
| A.V.FINE | | | | |
| S.MED | | | | |
| S.FINE | | | | |
| S.V.FINE | | | | |
| S.U.FINE | | | | |

Flap Discs




Professional products with long life and high abrasion capacity.

Zirconia alumina cloth

Aggressive zirconia alumina grit.

Ceramic aluminium oxide + Multibond

Ceramic high Performance grit.

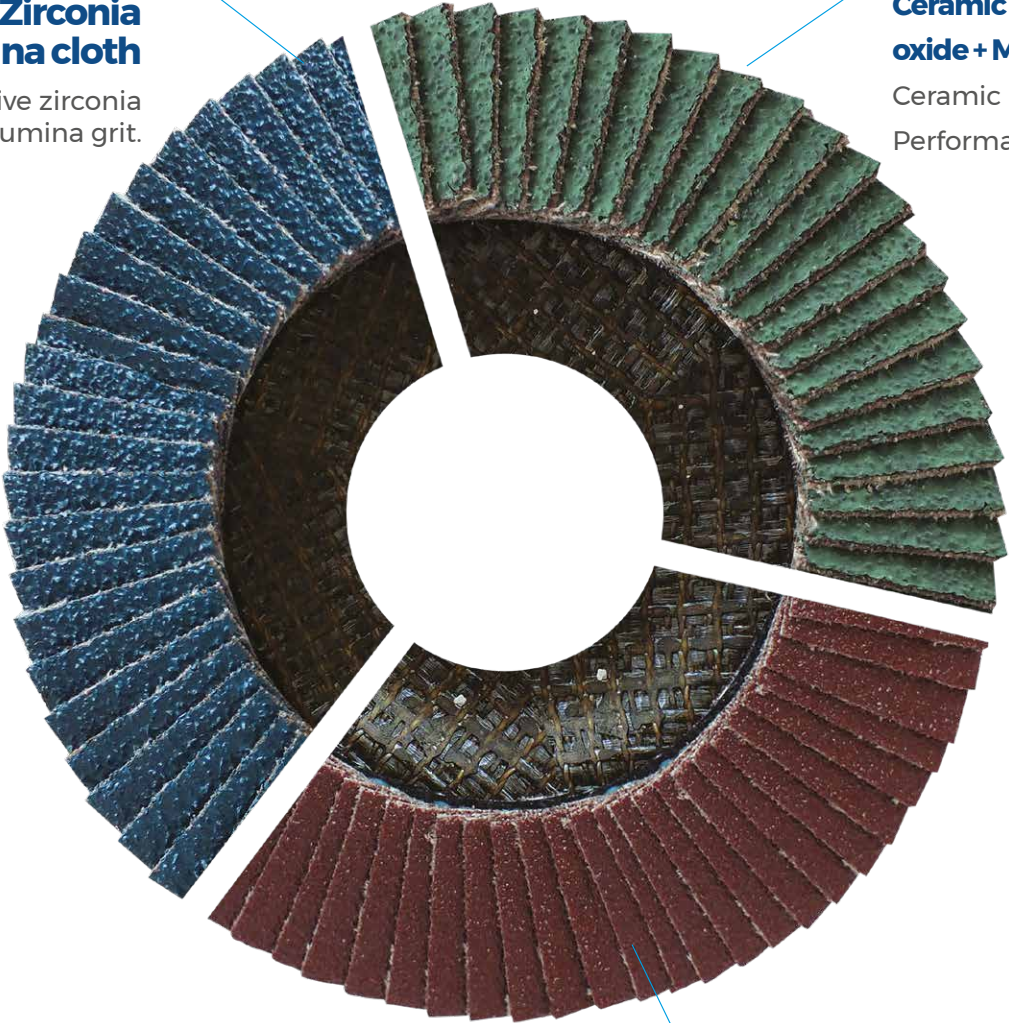

Aluminium oxide cloth

Durable grit aluminium oxide.

Egebant Alox

Product Features

Ideal for metal surfaces and weld abrasion applications.

Applications

- Metal
- Weld



| Grain | Backing Plate | Sizes |
|-----------------|---------------|----------------------------|
| Aluminium Oxide | Glass Fibre | 115x22 125x22 180x22 |

| Grit | | | | |
|------|-----|-----|-----|------|
| P36 | P40 | P60 | P80 | P120 |

Egebant ZR

Product Features

Ideal for metal surfaces and weld abrasion applications.

High stock removal performance thanks to its zirconia mineral.

Applications

- Stainless Steel



| Grain | Backing Plate | Sizes |
|----------|---------------|----------------------------|
| Zirconia | Glass-Fibre | 115x22 125x22 180x22 |

| Grit | | | | |
|------|-----|-----|-----|------|
| P36 | P40 | P60 | P80 | P120 |

Flap Discs

Egebant ZR Extra

Product Features

It has high abrasiveness and is durable and long-lasting. This product is especially ideal on steel and stainless steel surfaces.

Applications

- ☐ Weld
- ☐ Deburring
- ☐ Metal



| Grain | Backing Plate | Sizes |
|------------------|---------------|----------------------------|
| Zirconia alumina | Glass Fibre | 115x22 125x22 180x22 |

| Crit |
|------------------------------|
| P36 P40 P60 P80 P120 |

Egebant SER

Product Features

It is long-lasting, durable, and has a high level of abrasiveness.

Applications

- ☐ Stainless Steel
- ☐ Weld
- ☐ Deburring
- ☐ Metal



| Grain | Backing Plate | Sizes |
|-------------------------|---------------|----------------------------|
| Ceramic Aluminium Oxide | Glass Fibre | 115x22 125x22 180x22 |

| Crit |
|------------------------------|
| P36 P40 P60 P80 P120 |

Sander Alox

Product Features

Ideal for metal surfaces and weld abrasion applications.

Applications

- Metal
- Weld



| Grain | Backing Plate | Sizes |
|-----------------|---------------|----------------------------|
| Aluminium Oxide | Glass Fibre | 115x22 125x22 180x22 |

| Crit |
|------------------------------|
| P36 P40 P60 P80 P120 |

Sander ZR

Product Features

Ideal for metal surfaces and weld abrasion applications.

High stock removal performance thanks to its zirconia mineral

Applications

- Stainless Steel



| Grain | Backing Plate | Sizes |
|--------------------------|-----------------------------------|----------------------------|
| Zirconia al. / Al. oxide | Plastic Glass Fibre reinforced | 115x22 125x22 180x22 |

| Crit |
|------------------------------|
| P36 P40 P60 P80 P120 |

Radial Discs

Radial CSD Disc

Product Features

For scraping paint and varnish, removing rust and satin used.

It is suitable for use with angle grinder machine.



Applications

- ▣ Fiberglass
- ▣ Metal
- ▣ Paint
- ▣ Plastic

| Grain | Color | Sizes |
|-----------------------|-------|--------|
| Silicon Carbide (SIC) | Black | 100x22 |
| | Blue | 115x22 |
| | | 125x22 |
| | | 150x22 |
| | | 180x22 |

Radial Nonwoven Disc

Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface. It is suitable for use with angle grinder machine

Applications

- ▣ Metals



| Grain | Sizes | Grit |
|---|--------|---|
| Aluminium Oxide, Silicon Carbide (SIC) | 115x20 | A. Fine, A. Very Fine, S. Fine, S. Very Fine, S. Ultra Fine |

Radial Abrasive Disc

Product Features

It is used for light stock removal without leaving deep lines.

Applications

- ▣ Metals
- ▣ Stainles Steel
- ▣ Steel



| Grain | Grit | Sizes |
|-----------------|--------|---------------|
| Aluminium Oxide | 60-400 | 115x22-125x22 |

Quick Change Abrasives

Product Features

Easy to change used with rotary sander machines for grinding finishing and deburring on metal wood and plastics.



| Diameter | Mineral | Grain | Grit | Unit / Box |
|----------|--|-----------------|--------|------------|
| 30 mm | Alox, Zirconia, Silicon Carbide, A Coarse, A Medium, A Very Fine | Nonwoven | 24-400 | 100 |
| 50 mm | Alox, Zirconia, Silicon Carbide, A Coarse, A Medium, A Very Fine | Fiber, Nonwoven | 24-400 | |
| 75 mm | Alox, Zirconia, Silicon Carbide, A Coarse, A Medium, A Very Fine | Fiber, Nonwoven | 24-400 | |
| 100 mm | Alox, Zirconia, Silicon Carbide, A Coarse, A Medium, A Very Fine | Fiber, Nonwoven | 24-400 | |

Drum Abrasives

Product Features

It is suitable for use in processes such as surface development and deburring. It has a wide application area thanks to different grit sizes and sandpaper options.



egebant®

Headquarter

A: TOSB 3. Cadde No: 23 Pk. 41420

Sekerpinar, Cayirova/Kocaeli

T: +90 262 679 1313

F: +90 262 679 1300

E: info@egebant.com.tr

www.egebant.com.tr



/egebant



/egebantcom



/Egebant



/Egebant



/EgebantComTr